



Iris Service Provision Monthly Report March 2024



ESSP-TN-35083

Iss. 01-02

Date: 04/04/2024

If printed, make sure it is the applicable version



TABLE OF CONTENT

| | |
|--|-----------|
| EXECUTIVE SUMMARY | 3 |
| 1 IRIS ATN/OSI SERVICE LEVEL 1 (SL1)..... | 4 |
| 1.1 LATENCY..... | 4 |
| 1.2 TECHNICAL CONTINUITY | 4 |
| 1.3 PERFORMANCE EVOLUTION | 7 |
| 2 IRIS ATN/OSI SERVICE LEVEL 2 (SL2)..... | 8 |
| 2.1 DELIVERY TIME..... | 8 |
| 2.2 TECHNICAL CONTINUITY | 8 |
| 2.3 PERFORMANCE EVOLUTION | 10 |
| APPENDIX A LIST OF ACRONYMS | 11 |

TABLE OF FIGURES

| | |
|---|----|
| FIGURE 1: CUMULATIVE PERFORMANCE DISTRIBUTION FOR ISP (SL1), FOR MARCH 2024 | 5 |
| FIGURE 2: SL1 TT – MARCH 2024..... | 5 |
| FIGURE 3: SL1 ET – MARCH 2024 (RCP AS ED-120)..... | 6 |
| FIGURE 4: SL1 ET – MARCH 2024 (RCP130/A1) | 7 |
| FIGURE 5: CUMULATIVE PERFORMANCE DISTRIBUTION FOR ISP (SL2), FOR MARCH 2024 | 9 |
| FIGURE 6: SL2 DT - MARCH 2024..... | 9 |
| FIGURE 7: SL2 OT - MARCH 2024..... | 10 |

TABLE OF TABLES

| | |
|--|----|
| TABLE 1: IRIS SL1 LATENCY..... | 4 |
| TABLE 2: IRIS SL1 TECHNICAL CONTINUITY | 4 |
| TABLE 3: IRIS SL1 PERFORMANCE – 6 MONTHS EVOLUTION | 7 |
| TABLE 4: IRIS SL2 DELIVERY TIME | 8 |
| TABLE 5: IRIS SL2 PERFORMANCE – 6 MONTHS EVOLUTION | 10 |



EXECUTIVE SUMMARY

This report presents the IRIS services performance during March 2024. The report contains global results for the reported period, including maps and tables with the performance through different parameters.

Additional and more detailed information about IRIS performance can be found at the [Iris User Support Website](#).

Iris ATN/OSI Service Level 1 (SL1)

This Service Level enables the following RCP specifications supporting CPDLC application for ATN B1 and ATS B2 data link services:

- RCP specified in the ED-120 as interpreted in the Eurocontrol guidelines.
- RCP130/A1 specified in the ED-228A / DO-350A and referred in the ED-242C / DO-343D

The SL1 performance values fulfilled the target values defined in the Iris SDD in the 82.8% of the ACCs in which the Iris SL1 is provided.

The values for the whole Iris Service Area are:

- SL1 Nominal Transaction Time (≤ 10 seconds at 95%): 4.7s
- SL1 ATN B1 Expiration Time (≤ 18 seconds at 99%) 6.2s
- SL1 ATS B2 Expiration Time (≤ 24 seconds at 99.5%): 13.9s
- SL1 ATN B1 Technical Continuity ($\geq 99\%$) was 99.7%
- SL1 ATS B2 Technical Continuity ($\geq 99.5\%$) was 100%

From previous results, it can be observed that Iris performance during the reported period have been compliant for the latency and continuity parameters.

Further details can be found in section 1.

Iris ATN/OSI Service Level 2 (SL2)

This Service Level 2 which enables the following RSP specification supporting ADS-C application for ATS B2 data link services:

- RSP160/A1 specified in the ED-228A / DO-350A and referred in the ED-242C / DO-343D

The SL2 performance values did not fulfil the target values defined in the Iris SDD in the ACC in which the Iris SL2 is provided.

The values for the whole Iris Service Area are:

- SL2 Nominal Delivery Time (≤ 9 seconds at 95%): 5.5s
- SL2 Overdue Delivery Time (≤ 17 seconds at 99.5%): 18.3s
- SL2 Technical Continuity ($\geq 99.5\%$): 99.3%

From previous results, it can be observed that Iris performance during the reported period did not fulfil the commitments for SL2 Overdue Delivery Time nor for SL2 Technical Continuity.

Further details can be found in section 2.

During the reported period, the total number of Iris aircrafts connected and handled has been 3.



1 IRIS ATN/OSI SERVICE LEVEL 1 (SL1)

Irises ATN/OSI Service Level 1 corresponds to the Controller Pilot Data Link Communications (CPDLC), which is the application that allows ATC data communications between controllers and pilots.

1.1 Latency

SL1 Nominal Transaction Time (TT) is defined as the maximum time at which 95 percent of all transactions, that are initiated, are completed.

It is computed as the time from when the uplink message is sent by the end-user ground system (as time-stamped by the ground system in the uplink message) and the time when the downlink LACK is received by the end-user ground system for the 95 percent.

SL1 ATS B2 Expiration Time (ET) is defined as the maximum time at which 99.5 percent of all transactions, that are initiated, are completed, after which the initiator is required to revert to an alternative procedure.

It is computed as the time from when the uplink message is sent by the end-user ground system (as time-stamped by the ground system in the uplink message) and the time when the downlink LACK is received by the end-user ground system for the 99.5 percent.

The achieved performance values for the reported period are:

| Parameter | Value |
|--------------------|--------------|
| TT | 4.7 seconds |
| ET (RCP as ED-120) | 6.2 seconds |
| ET (RCP130/A1) | 13.9 seconds |

Table 1: Iris SL1 latency

1.2 Technical Continuity

SL1 ATN B1 Technical Continuity is defined as probability that a transaction completes before the Expiration Time (ET) expires.

It is computed as the number of uplink messages requiring a LACK (ACK = 1) for which a DM100 LACK or a DM62 ERROR response is received within the ET target value (as per the Iris SDD) or less / total number of uplinks requiring a LACK (ACK = 1).

The achieved performance values for the reported period are:

| Parameter | Value |
|------------------------|--------|
| C [TT] | 99.2 % |
| C [ET (RCP as ED-120)] | 99.7 % |
| C [ET (RCP130/A1)] | 100 % |

Table 2: Iris SL1 Technical Continuity

The following figure presents the delays of the messages for Service level 1, both RCP as ED-120 and RCP130/A1, for the percentile between 90% and 100%.

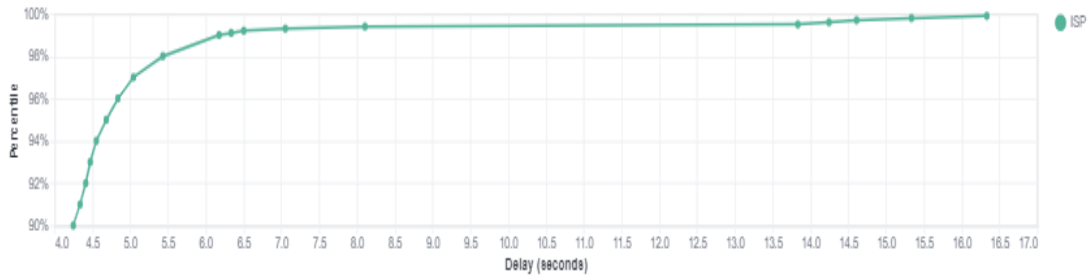


Figure 1: Cumulative performance distribution for ISP (SL1), for March 2024

The following maps present the delays displayed over the service area.

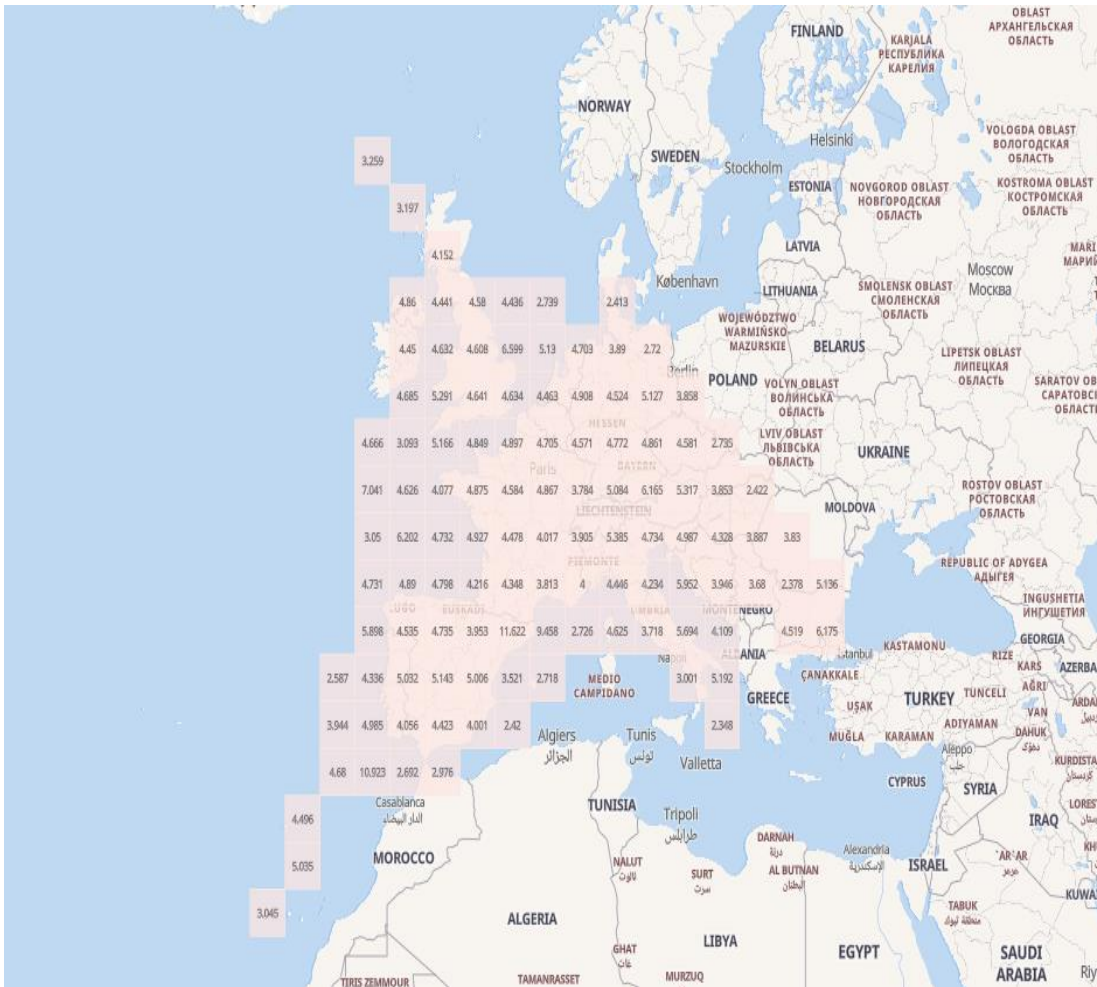


Figure 2: SL1 TT – March 2024

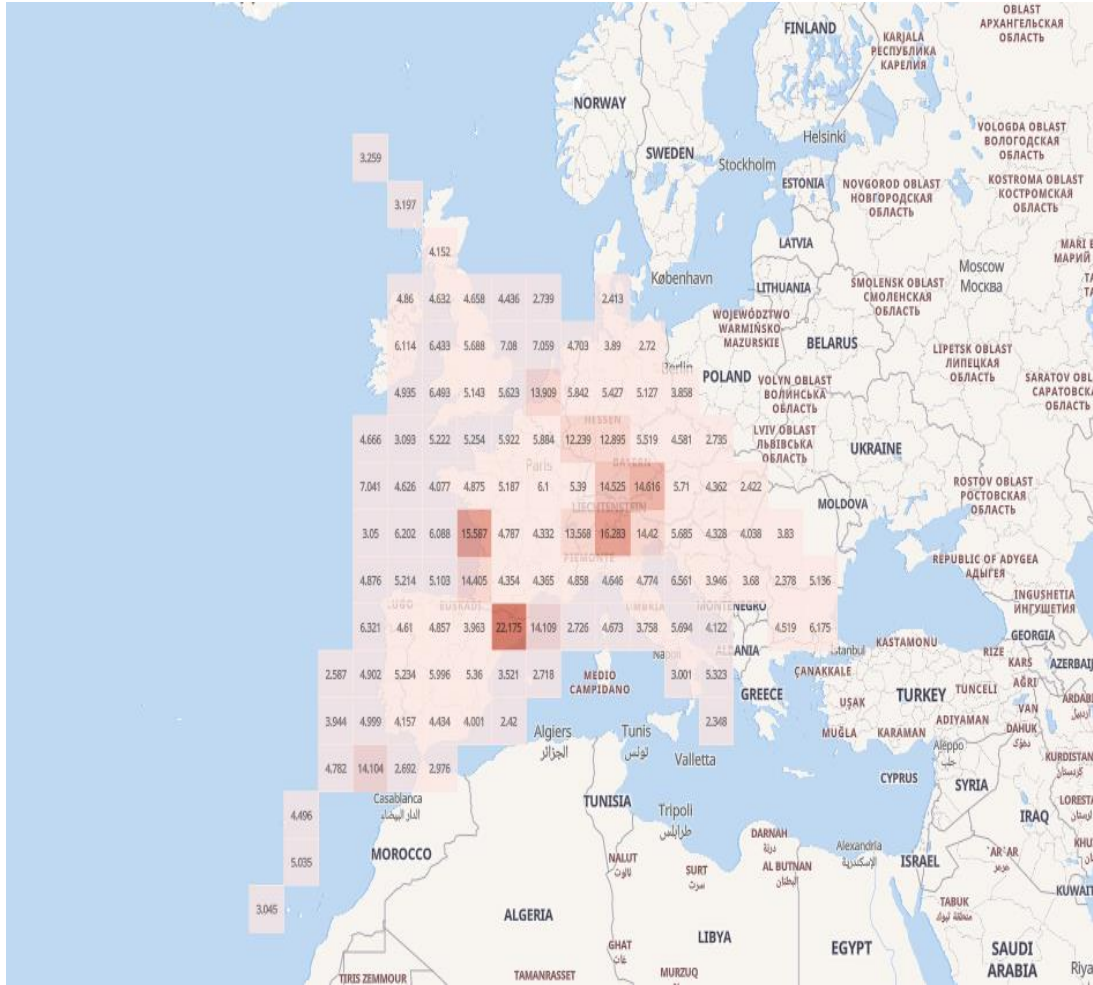


Figure 3: SL1 ET – March 2024 (RCP as ED-120)

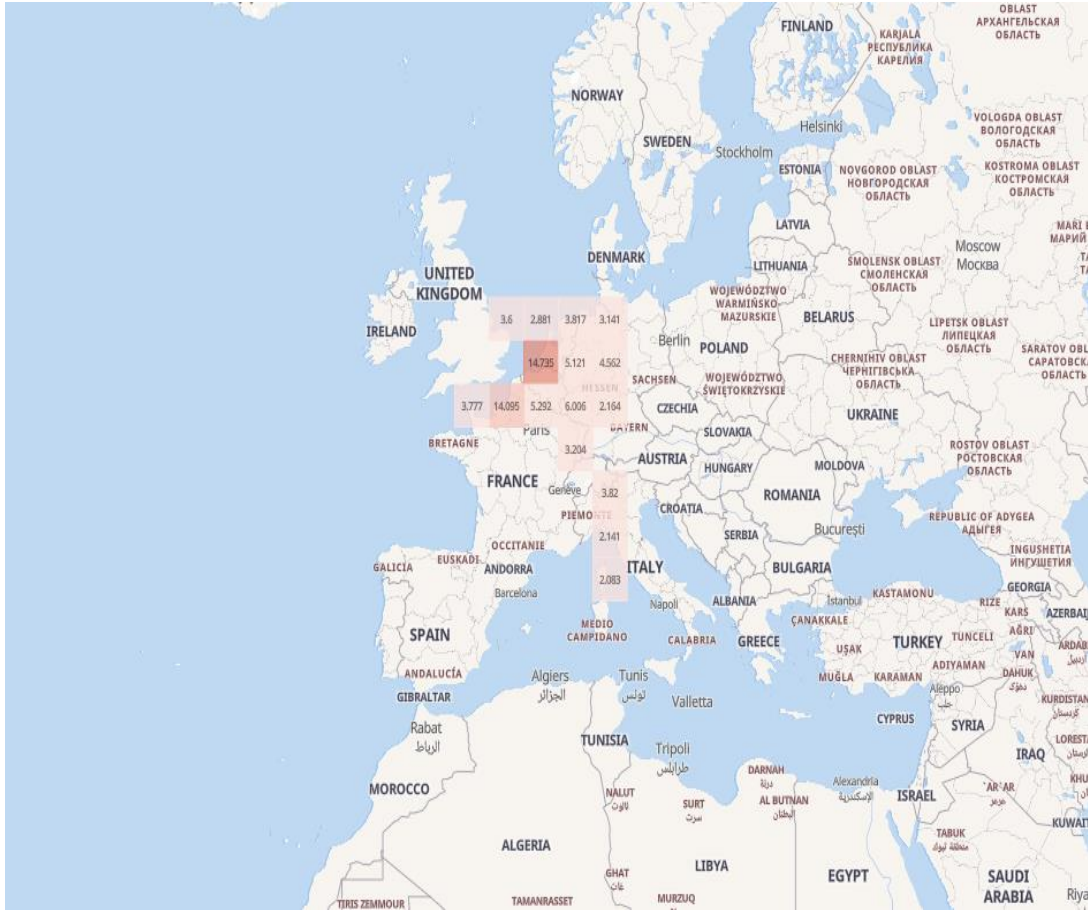


Figure 4: SL1 ET – March 2024 (RCP130/A1)

1.3 Performance evolution

The following table shows the evolution of the previously presented performance parameters for last 6 months.

| Parameter | 2023-10 | 2023-11 | 2023-12 | 2024-01 | 2024-02 | 2024-03 |
|---------------------------------|---------|---------|---------|---------|---------|---------|
| SL1 Nominal Transaction Time | -- | -- | -- | 4.8s | 4.2s | 4.7s |
| SL1 ATN B1 Expiration Time | -- | -- | -- | 5.2s | 6.9s | 6.2s |
| SL1 ATS B2 Expiration Time | -- | -- | -- | 7.8s | 5.1s | 13.9 |
| SL1 ATN B1 Technical Continuity | -- | -- | -- | 98.7% | 99.4% | 99.7% |
| SL1 ATS B2 Technical Continuity | -- | -- | -- | 98.3% | 100.00% | 100.00% |

Table 3: Iris SL1 performance – 6 months evolution



2 IRIS ATN/OSI SERVICE LEVEL 2 (SL2)

Iris ATN/OSI Service Level 2 corresponds to the Automatic Dependent Surveillance – Contract (ADS-C). A mean by which the terms of an ADS-C agreement will be exchanged between the ground system and the aircraft, via a data link, specifying under what conditions ADS-C reports would be initiated, and what data would be contained in the reports.

2.1 Delivery time

SL2 Surveillance nominal delivery time (DT) is defined as the maximum nominal time within which 95% of surveillance data deliveries are required to be successfully delivered.

It is computed as the time from when the downlink message is sent by the aircraft (as time-stamped by the aircraft system in the Basic Group downlink message) and the time when the downlink message is received by the Organization ground system for the 95 percent.

SL2 overdue delivery time of surveillance data (OT) is defined as maximum time for the overdue delivery time of surveillance data at which 99.5 percent of all transactions, that are initiated, are completed, after which the initiator is required to revert to an alternative procedure.

It is computed as the time from when the downlink message is sent by the aircraft (as time-stamped by the aircraft system in the Basic Group downlink message) and the time when the downlink message is received by the Organization ground system for the 99.5 percent.

The achieved performance values for the reported period are:

| Parameter | Value |
|-----------|--------------|
| DT | 5.5 seconds |
| OT | 18.3 seconds |

Table 4: Iris SL2 Delivery time

The high value for the Overdue Delivery Time observed this month is due to an avionic overload not linked to Iris operational communications.

2.2 Technical Continuity

SL2 Technical Continuity is defined as probability that a transition completes before the Surveillance overdue delivery time (OT) expires.

It is computed as the number of ADS-C downlink messages which are forwarded to the Organization within the target value (as per the Iris SDD) or less / total number of ADS-C downlink messages.

The SL2 technical continuity during the reported period is 99.3%.

The technical continuity performance is impacted by the same issue impacting the Overdue Delivery Time (see section [2.1]).

The following figure presents the delivery time of the messages for the Service level 2, for the percentile between 90% and 100%.

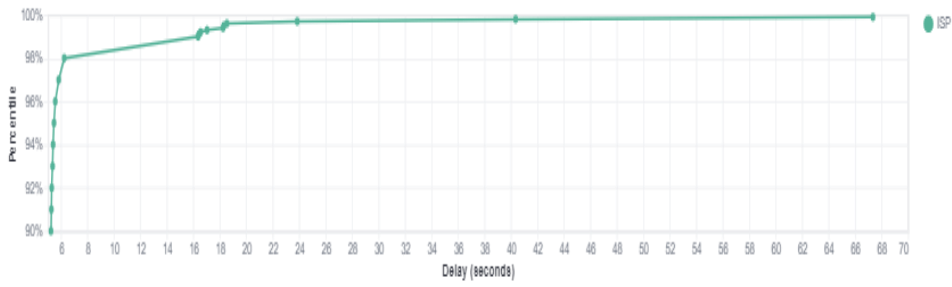


Figure 5: Cumulative performance distribution for ISP (SL2), for March 2024

The following maps present the delivery time displayed over the service area.



Figure 6: SL2 DT - March 2024

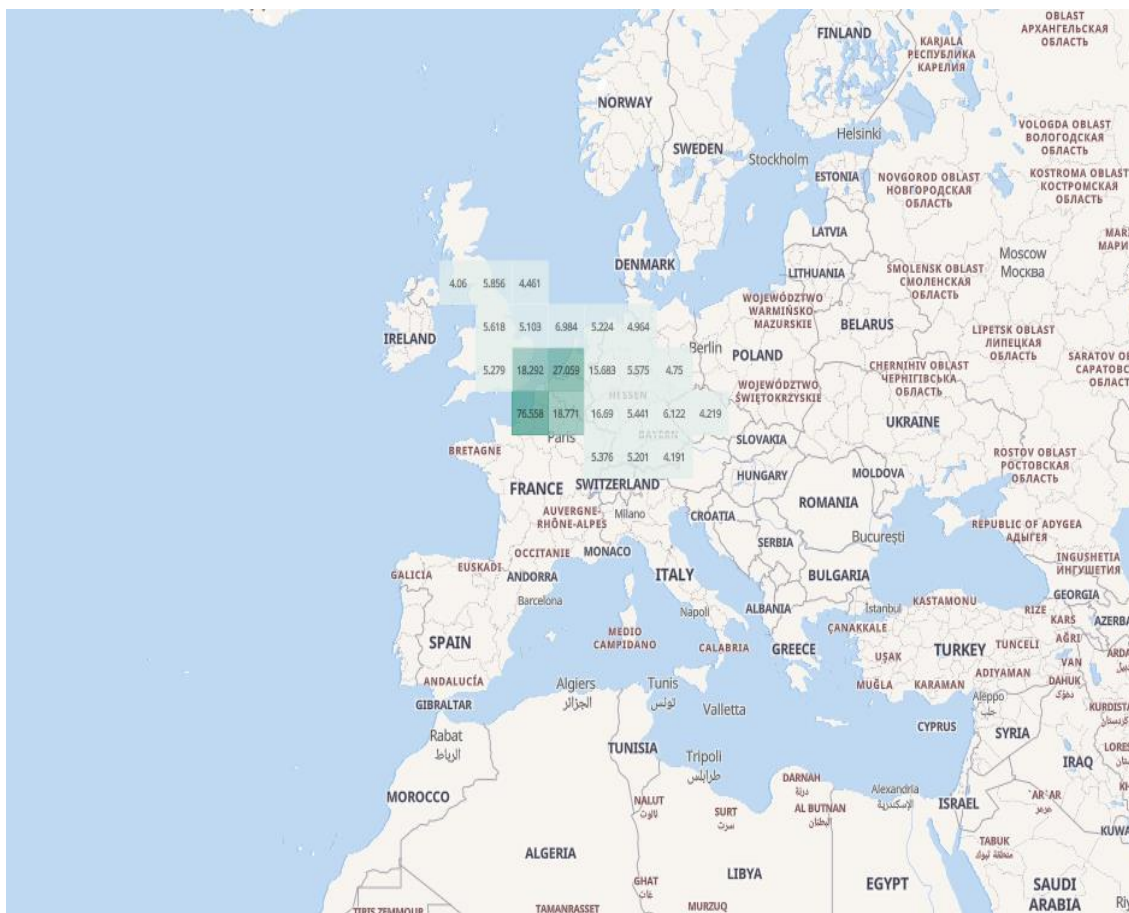


Figure 7: SL2 OT - March 2024

2.3 Performance evolution

The following table shows the evolution of the previously presented performance parameters for last 6 months.

| Parameter | 2023-10 | 2023-11 | 2023-12 | 2024-01 | 2024-02 | 2024-03 |
|---------------------------|---------|---------|---------|---------|---------|---------|
| SL2 Nominal Delivery Time | -- | -- | -- | 5.5s | 5.5s | 5.5s |
| SL2 Overdue Delivery Time | -- | -- | -- | 6.6s | 6.0s | 18.3s |
| SL2 Technical Continuity | -- | -- | -- | 100% | 100% | 99.3% |

Table 5: Iris SL2 performance – 6 months evolution



APPENDIX A LIST OF ACRONYMS

The following table provides the definition of the acronyms used in this document.

| Acronym | Definition |
|---------|--|
| ACC | Air Control Center |
| ADS-C | Automated Dependent Surveillance- Contract |
| ATC | Air Traffic Control |
| ATN | Aeronautical Telecommunication Network |
| ATS | Application Transport Service |
| B1 | Baseline 1 |
| B2 | Baseline 2 |
| CM | Context Mana |
| CPDLC | Controller Pilot Data Link Communications |
| DM | Downlink Message |
| DT | Delivery Time |
| ESSP | European Satellite Services Provider |
| ET | Expiration Time |
| IDRP | Inter-Domain Routing Protocol |
| ISP | Iris Service Provider |
| OSI | Open System Interconnection |
| OT | Overdue Time |
| RCP | Required Communications Performance |
| RSP | Required Surveillance Performance |
| SDD | Service Definition Document |
| SL | Service Level |
| TP | Transport Protocol |
| TT | Transaction Time |



END OF DOCUMENT